PUMA HT / QL series

Twin Spindle Turning Center & Gantry Loader series

Doosan Machine Tools

Optimal Solutions for the Future

Two Spindle, 4-axes Turning Center Realizes Twice the Productivity

PUMA HT230T / H250T / H310T
PUMA H250TM / H310TM

Integral CNC Gantry Loader Ensures Versatile Automation and High Productivity

PUMA HT230TG/QL200H/QL300H
PUMA QL200HM/QL300HM

Main Spindle

Main spindle is supported by high precision bearing combination with large diameter. All spindle bearing are lubricated by grease.

C-axis contouring provides main spindle positioning in increments of 0.001degree. Three dimensional contouring, complex round and prismatic machining, square shoulder and lettering are accomplished by synchronizing the spindle with linear axes (on H250TM / H310TM / QL200HM / QL300HM)

PUMA HT230T / HT230TG series (6"class)

Max. spindle speed
4500 r/min

Motor (15/30min)
11/7.5 kW
(14.8/10.1 Hp)

PUMA H250T / QL200H series (8"class)

Max. spindle speed
4500 r/min

Motor (30min)
11 kW (14.8 Hp)

PUMA H310T / QL300H series (10"class)

Max. spindle speed
3500 r/min

Motor (30min)
18.5 kW (24.8 Hp)

C-axis control of main spindle

C-axis index
360° (in 0.001°increment)

C-axis braking torque
141 N·m (104.1 ft·lb) (H250TM / QL200HM)
319 N·m (235.4 ft·lb) (H310TM / QL300HM)

C-axis contouring torque
112 N·m (82.7 ft·lb) (H250TM / QL200HM)
393 N·m (290.0 ft·lb) (H310TM / QL300HM)

Machining Application

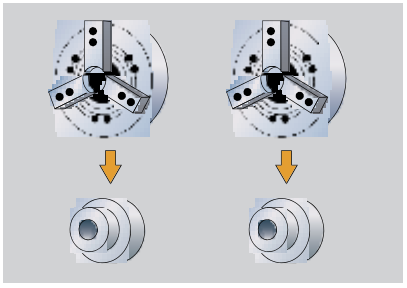

Turning Identifical Parts on Both Spindles

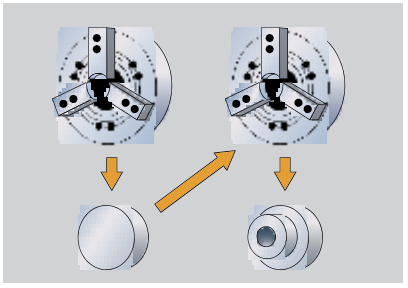

First Step on Left Spindle &Second Step on Right Spindle

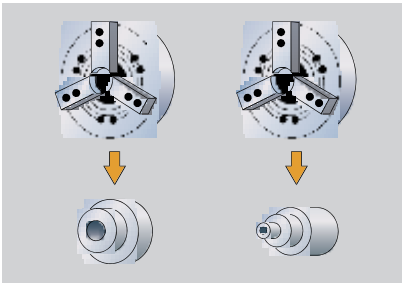

Turning Different Parts on Spindle

Main Spindle Power-torque Diagram

PUMA HT230T std.
- Max. spindle speed : 4500 r/min
- Motor power : 11 kW (14.8 Hp)

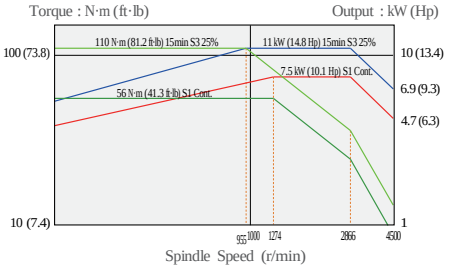

PUMA HT230T opt.
- Max. spindle speed : 6000 r/min
- Motor power : 11 kW (14.8 Hp)

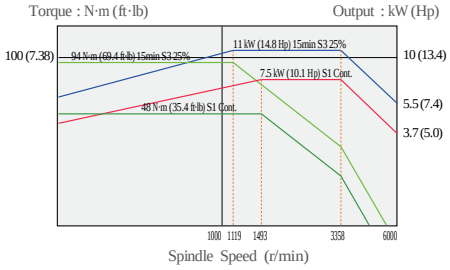

PUMA HT230T opt.
- Max. spindle speed : 4500 r/min
- Motor power : 15 kW (20.1 Hp)

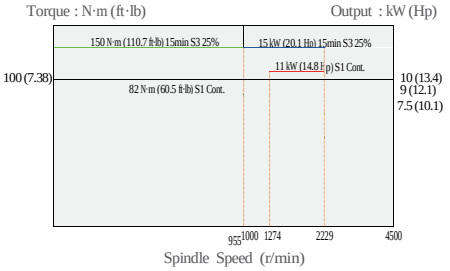

PUMA HT230TG std.
- Max. spindle speed : 4500 r/min
- Motor power : 7.5 kW (10.1 Hp)

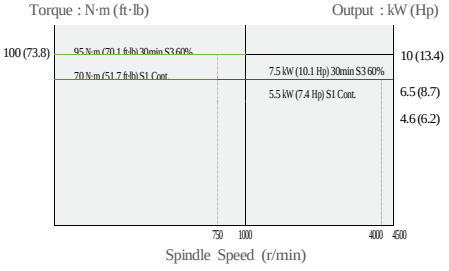

PUMA HT230TG opt.
- Max. spindle speed : 6000 r/min
- Motor power : 7.5 kW (10.1 Hp)

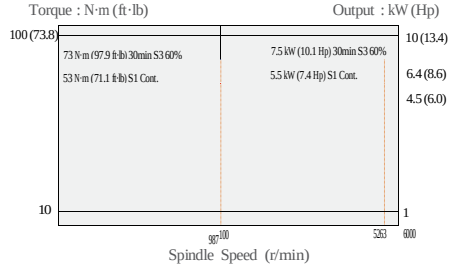

PUMA HT230TG opt.
- Max. spindle speed : 4500 r/min
- Motor power : 15 kW (20.1 Hp)

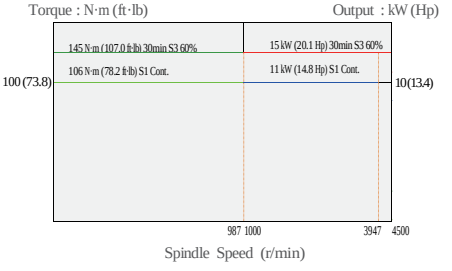

PUMA H250T [TM] / QL200H [HM] std.
- Max. spindle speed : 4500 r/min
- Motor power : 11 kW (14.8 Hp)

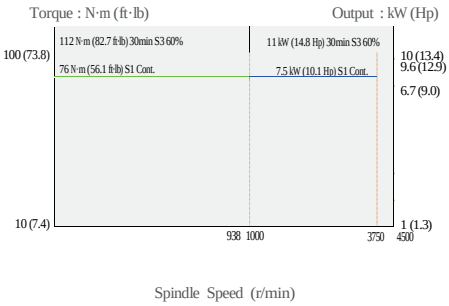

PUMA H250T [TM] / QL200H [HM] opt.
- Max. spindle speed : 4000 r/min
- Motor power : 15 kW (20.1 Hp) (High / Low winding)

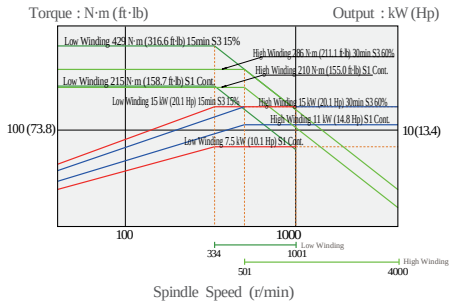

PUMA H250T [TM] / QL200H [HM] opt.
- Max. spindle speed : 4500 r/min
- Motor power : 15 kW (20.1 Hp) (High / Low winding)

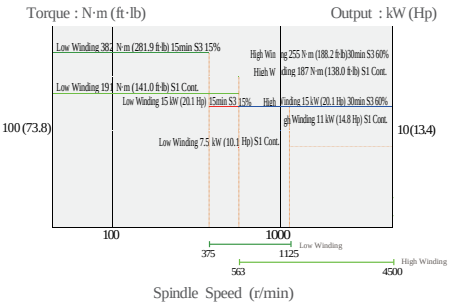

PUMA H310T [TM] / QL300H [HM] std.
- Max. spindle speed : 3500 r/min
- Motor power : 18.5 kW (24.8 Hp)

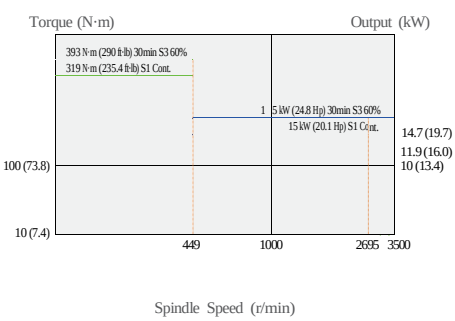

PUMA H310T [TM] / QL300H [HM] opt.
- Max. spindle speed : 3500 r/min
- Motor power : 18.5 kW (24.8 Hp) (High / Low winding)

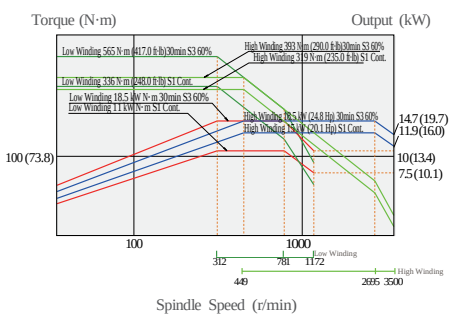

PUMA H310T [TM] / QL300H [HM] opt.
- Max. spindle speed : 3500 r/min
- Motor power : 22 kW (29.5 Hp)

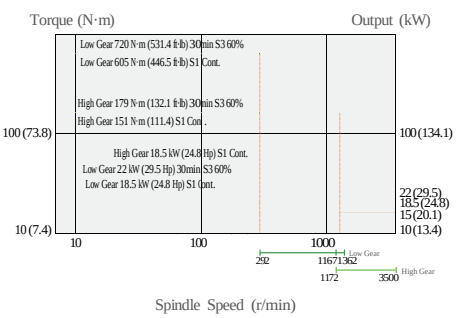

Turret

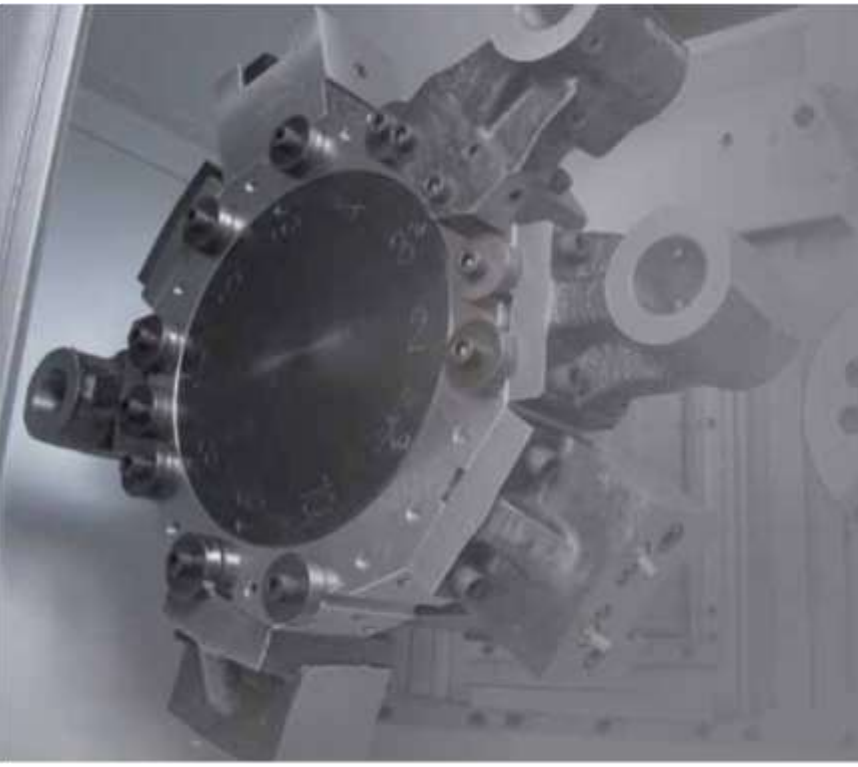

The heavy duty design provides unsurpassed rigidity for heavy stock removal, fine surface finishes, Turning tools are securely attached to the turret by wedge clamps.

Index time (1-station swivel)

HT230T / HT230TG : 0.25 s

H250T [TM] / QL200H [HM] : 0.3 s

H310T [TM] / QL300H [HM] : 0.35 s

2 axis V10 turret

No.of tool station

Left 10 + Right 10

HT230T / H250T / H310T / HT230TG / QL200H / QL300H

Rotary tool spindle power-torque diagram

PUMA H250TM / QL200HM

- Max. tool spindle speed : 3000 r/min
- Motor power : 3 kW (4.0 Hp)

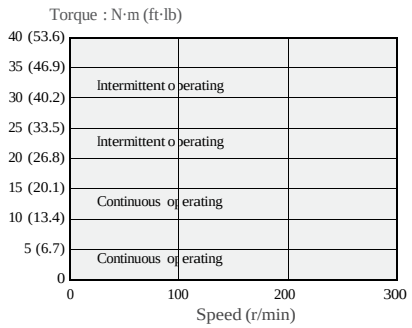

PUMA H310TM / QL300HM

- Max. tool spindle speed : 3000 r/min
- Motor power : 4 kW (5.4 Hp)

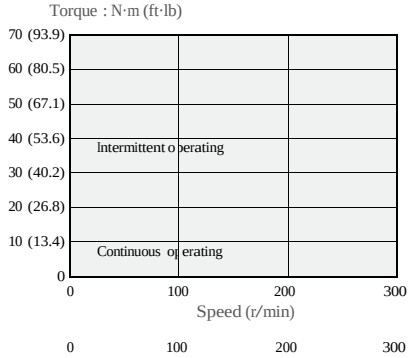

3 axis BMT / VDI turret

Total 24 tool stations turret (VDI) make it possible to complete complicated parts requiring many tools in just one set-up.

No.of tool station (H250TM / H310TM / QL200HM / QL300HM)

Left 12 + Right 12

H250TM / QL200HM BMT55

H310TM / QL300HM VDI 40

< BMT turret >

< VDI turret >

Machine Construction

All guide ways are wide wrap-around rectangular type for unsurpassed longterm rigidity and accuracy

Exclusive bed design provides exceptional accessibility to the chuck for convenient loading / unloading of parts. Separated left and right bed minimizes the effect of vibration in various cutting conditions and realize the high reliability.

For H250T / TM

For H250T / TM

Working Range

A : Max.turning dia.

240 mm (9.4 inch) (HT230T)

260 / 310 mm (10.2 / 12.2inch) (H250T / TM)

410 mm (16.1 inch) (H310T / TM)

B : Max.turning Length

165 mm (6.5 inch) (HT230T)

200 mm (7.9 inch) (H250T / TM)

230 mm (9.1 inch) (H310T / TM)

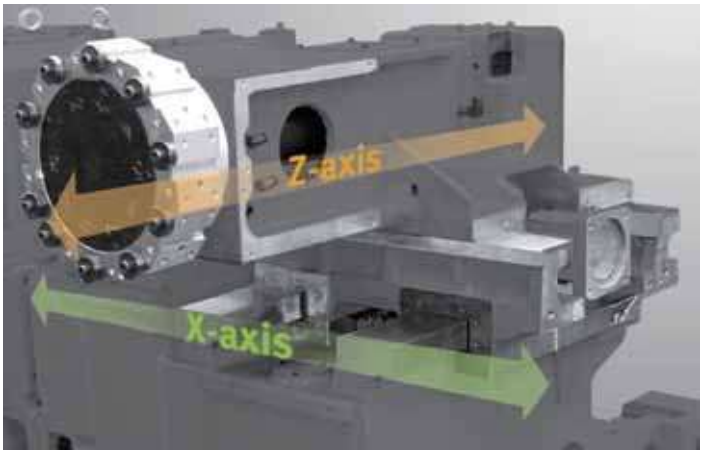

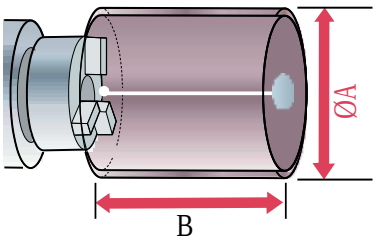

Left and Right side have the same working capacity.

	Axis travel (HT230T / H250T / H310T)	Rapid travel (HT230T / H250T / H310T)
X-axis	140 / 180 / 210 mm (5.5 / 7.1 / 8.3 inch)	24 m/min (0.9 ipm)
Z-axis	165 / 200 / 230 mm (6.5 / 7.9 / 9.1 inch)	24 m/min (0.9 ipm)

Gantry Loader Application

PUMA HT230TG / QL200H [HM] / QL300H [HM]

Twin spindles and Twin turrets
The machine realizes high productivity

From transmissions to four corner components which have any different shape, size and capacity are capable to be manufactured by Gantry Loader System.

FOUR CORNERS •

TRANSMISSIONS •

Variation of Gantry Loader Application (PUMA HT230TG / QL200H [HM] / QL300H [HM])

A1-type std.

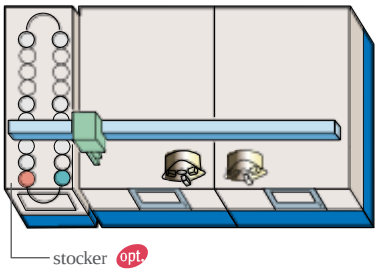

A2-type opt.

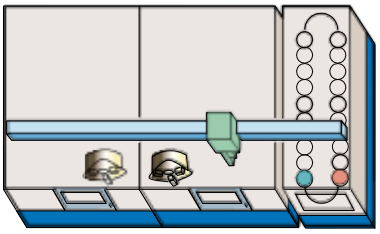

A3-type opt.

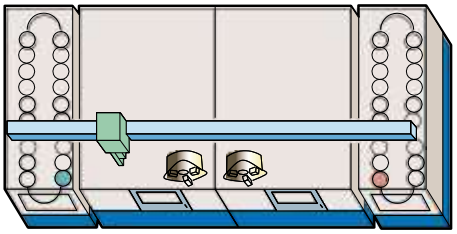

(● Loading position, ● Unloading postion)

Gantry Loader

Axis travel of Gantry loader*

PUMA HT230TG / QL200H [HM] / QL300H [HM]

X-axis 1850 / 2010 / 3105 mm
(72.8 / 79.1 / 122.2 inch)

Y-axis 545 / 700 / 945 mm
(21.5 / 27.6 / 37.2 inch)

Z-axis 180 / 200 / 200 mm
(7.1 / 7.9 / 7.9 inch)

* : Axis travel of gantry loader is
for A1-type gantry loader application

Servo driven CNC gantry loader

PUMA HT230TG / QL200H [HM] / QL300H [HM]
: 3-axis Servo driven (X, Y, Z)

Max. G-Loader Handling Size
(Ma gth)

PUMA HT230TG	PUMA QL200H/HM	PUMA QL300H/HM
		
Ø140×100	Ø160×115	Ø250×150

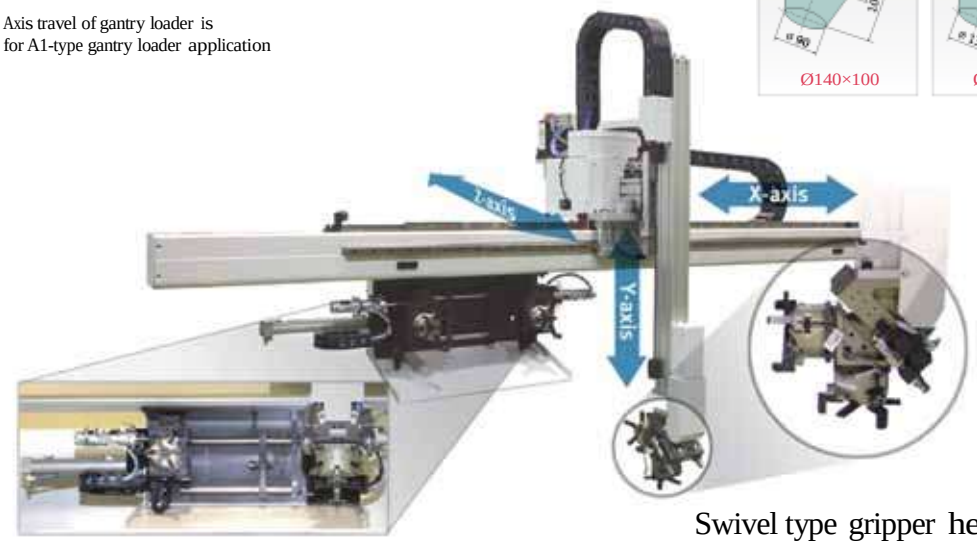

Swivel type gripper head
Wrist swivel angle : 180°

Ergonomic Design

Easy chip disposal

A large capacity chip pan is installed separately from the machine bed so that heat generated by cut chips will not distort the bed. The large coolant capacity allows a constant coolant temperature to be maintained for precision machining.

Accessibility

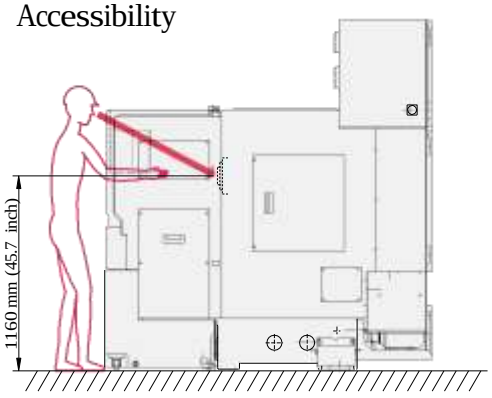

Easy accessibility to setup work pieces and tools which ensures operation efficiency.

Tooling System

unit : mm (inch)

PUMA HT230T / HT230TG

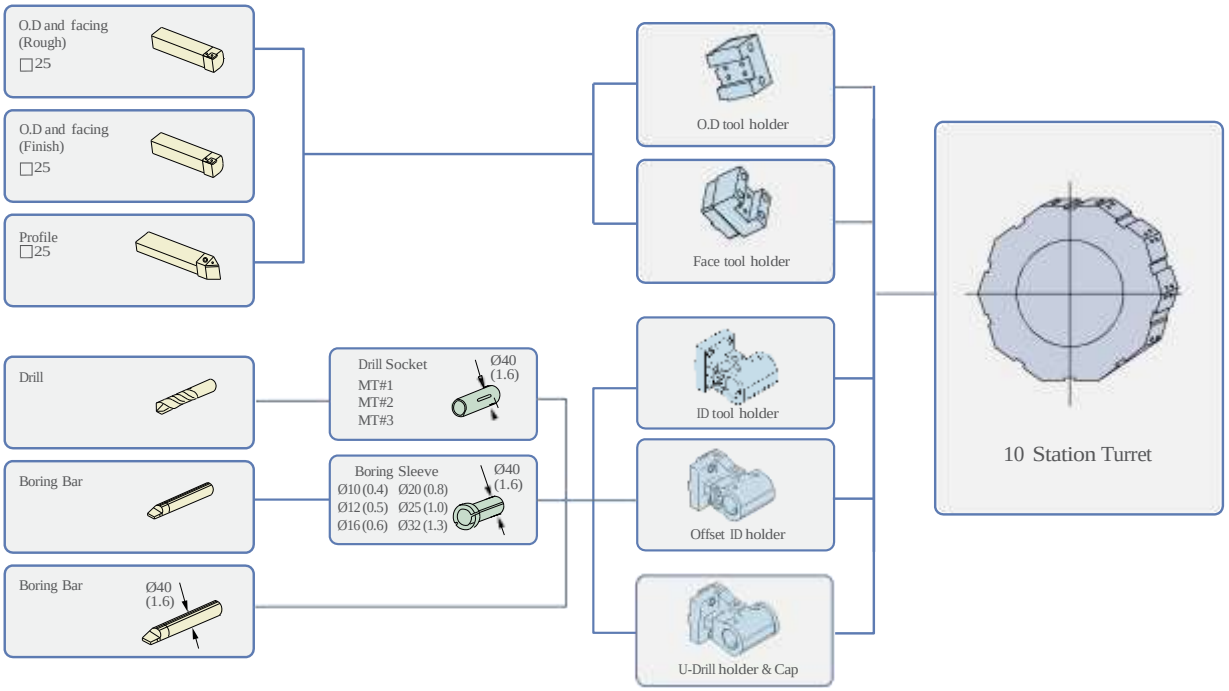

PUMA H250T / QL200H

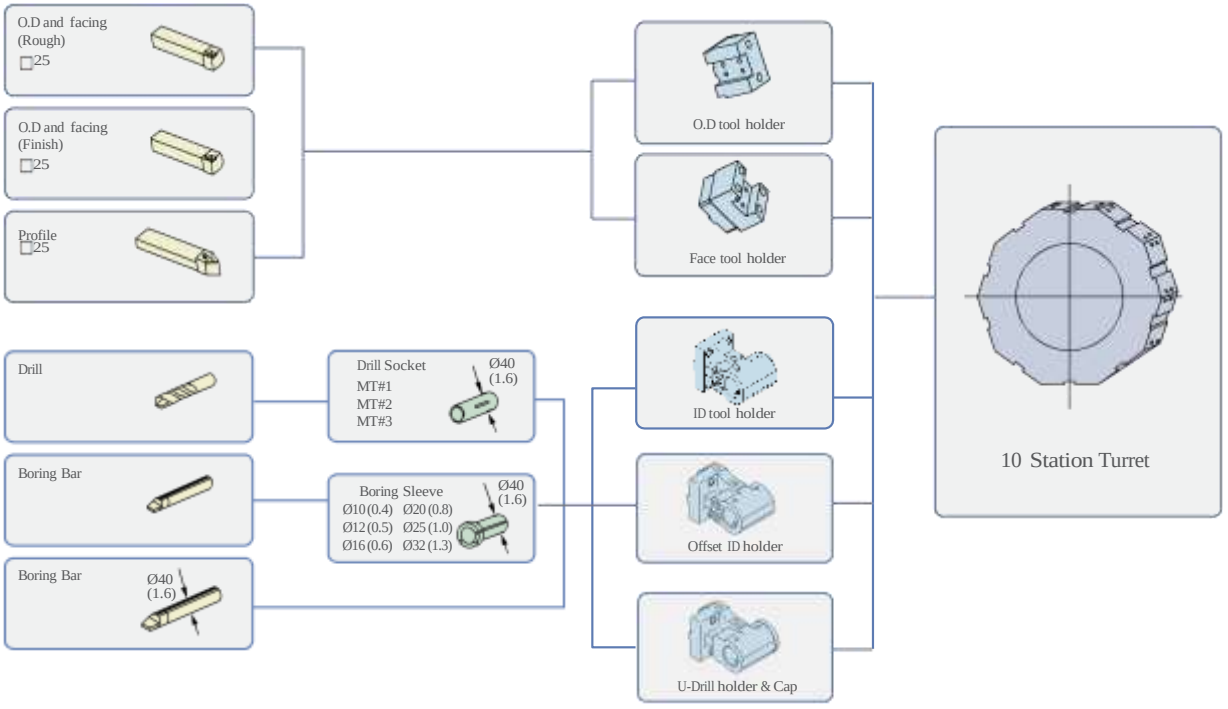

Note) Above tooling system is our recommendation. Depending on export condition, the standard tooling packed with the machine can be different.

unit : mm (inch)

PUMA H310T / QL300H

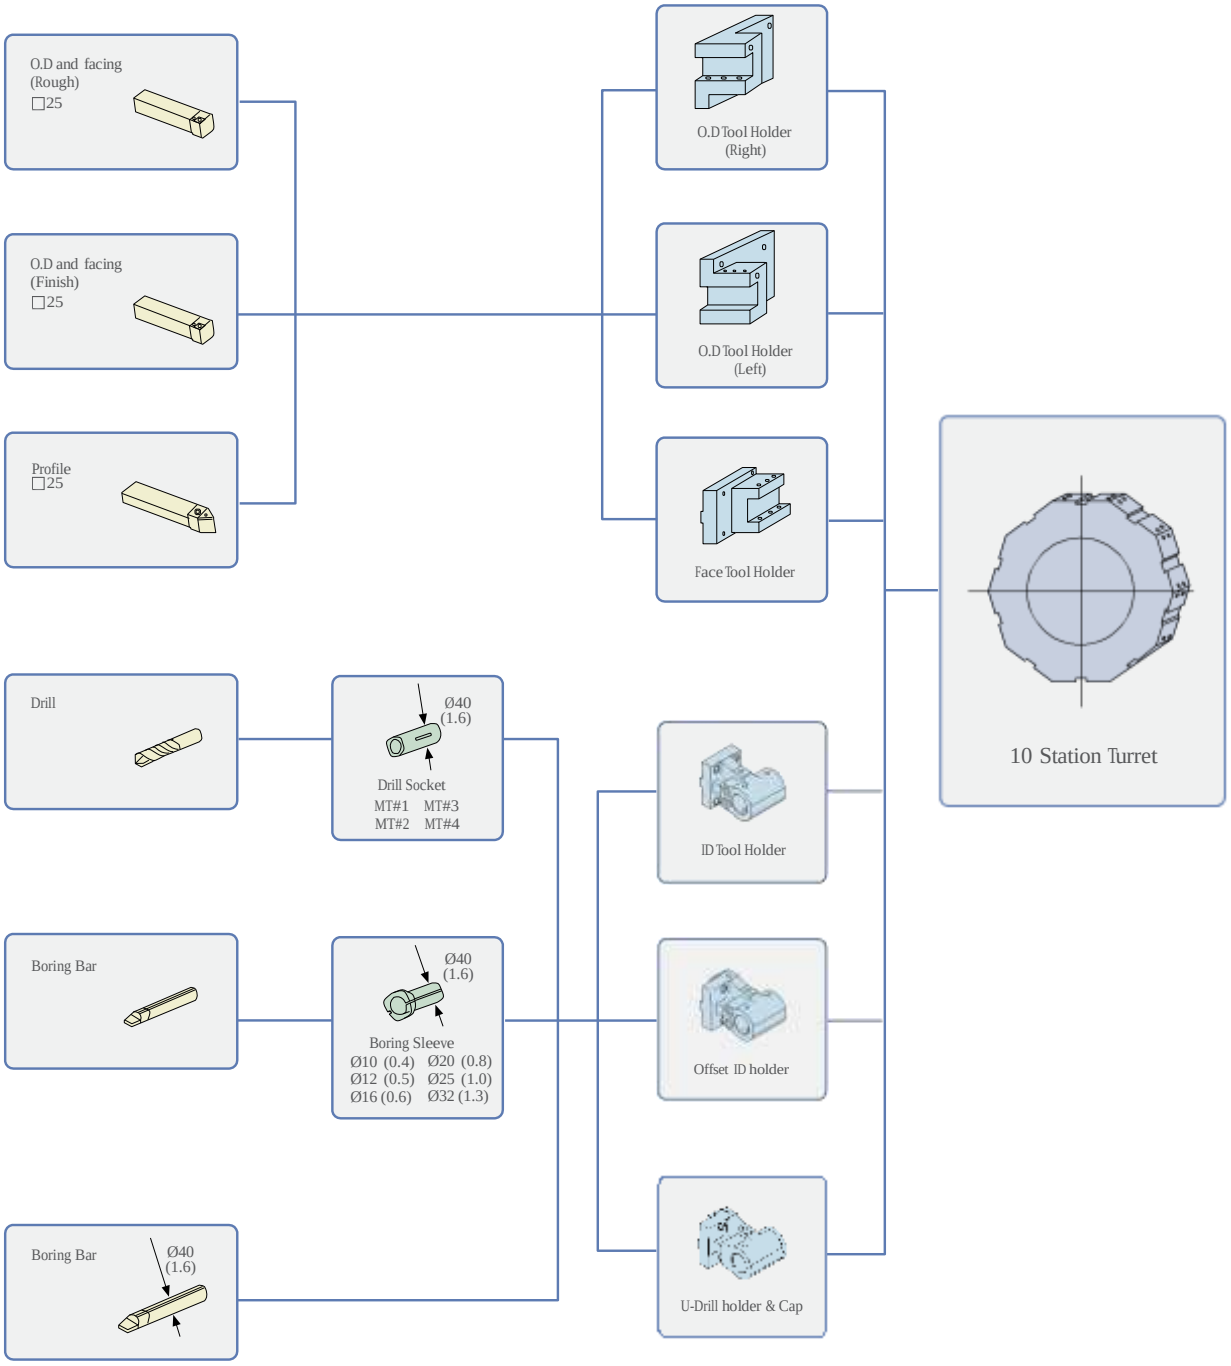

Note) Above tooling system is our recommendation. Depending on export condition, the standard tooling packed with the machine can be different.

Tooling System

unit : mm (inch)

PUMA H250TM / QL200HM

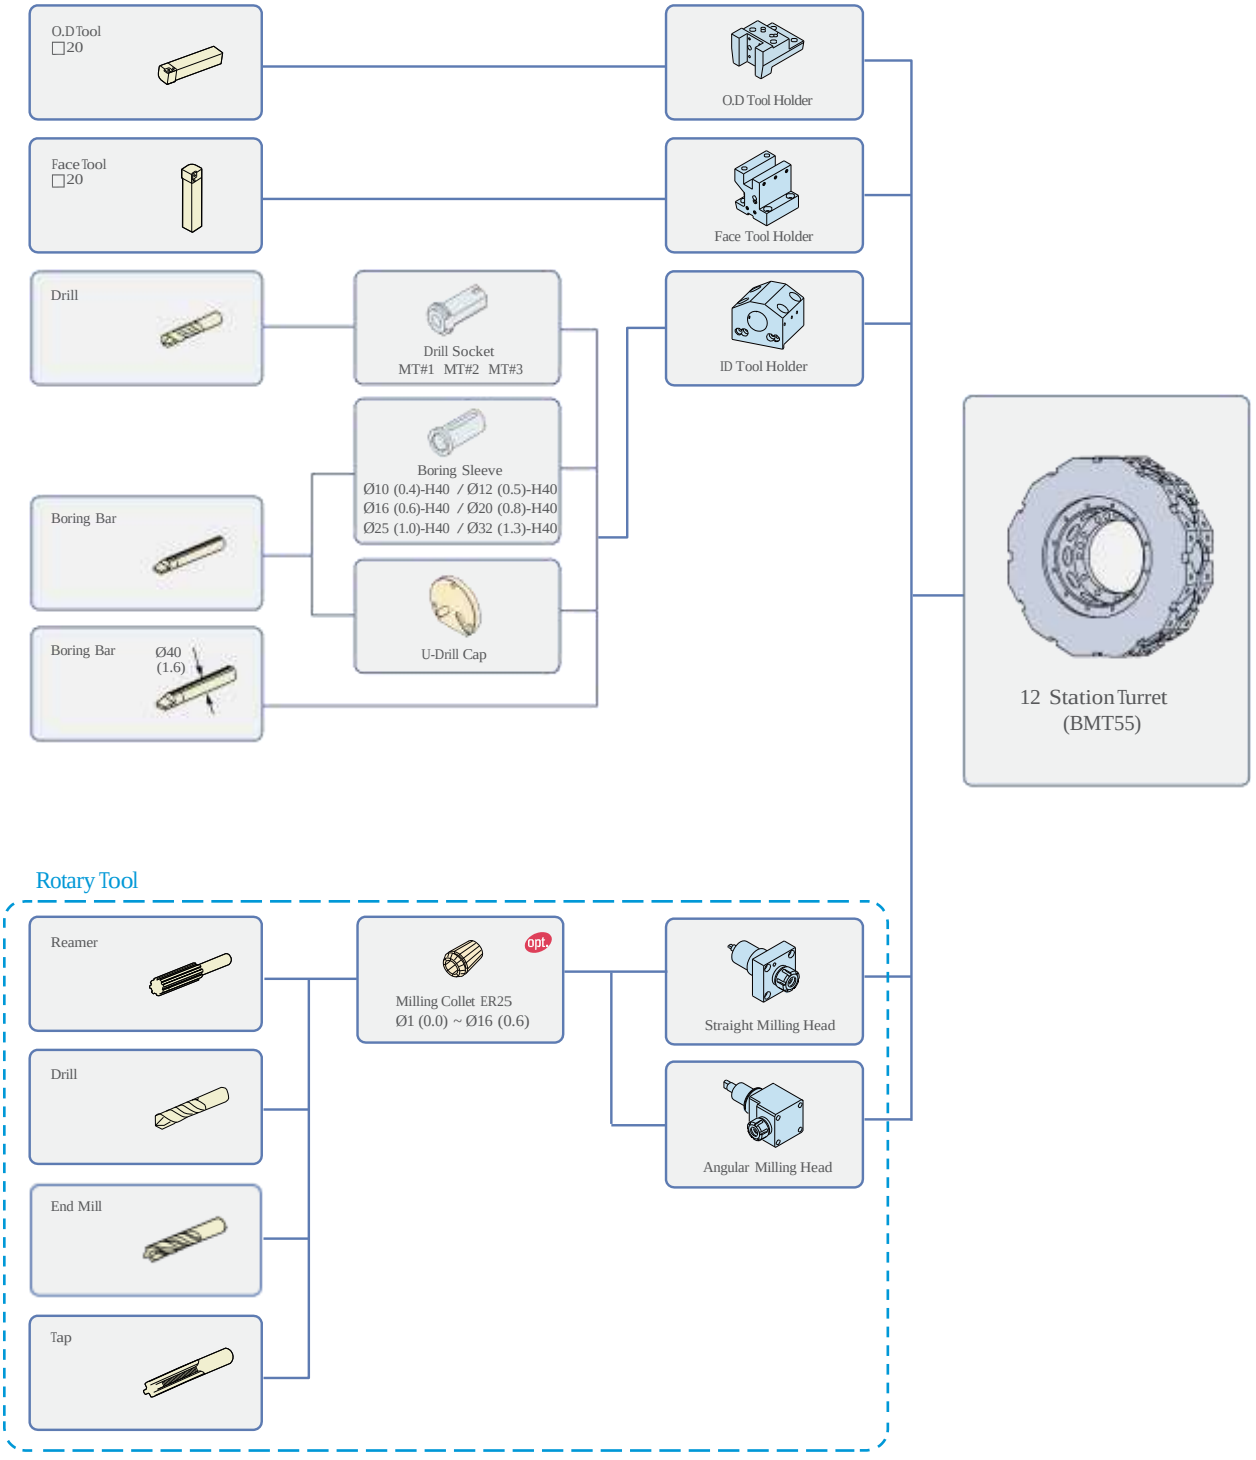

Note) Above tooling system is our recommendation. Depending on export condition, the standard tooling packed with the machine can be different.

unit : mm (inch)

PUMA H310TM / QL300HM

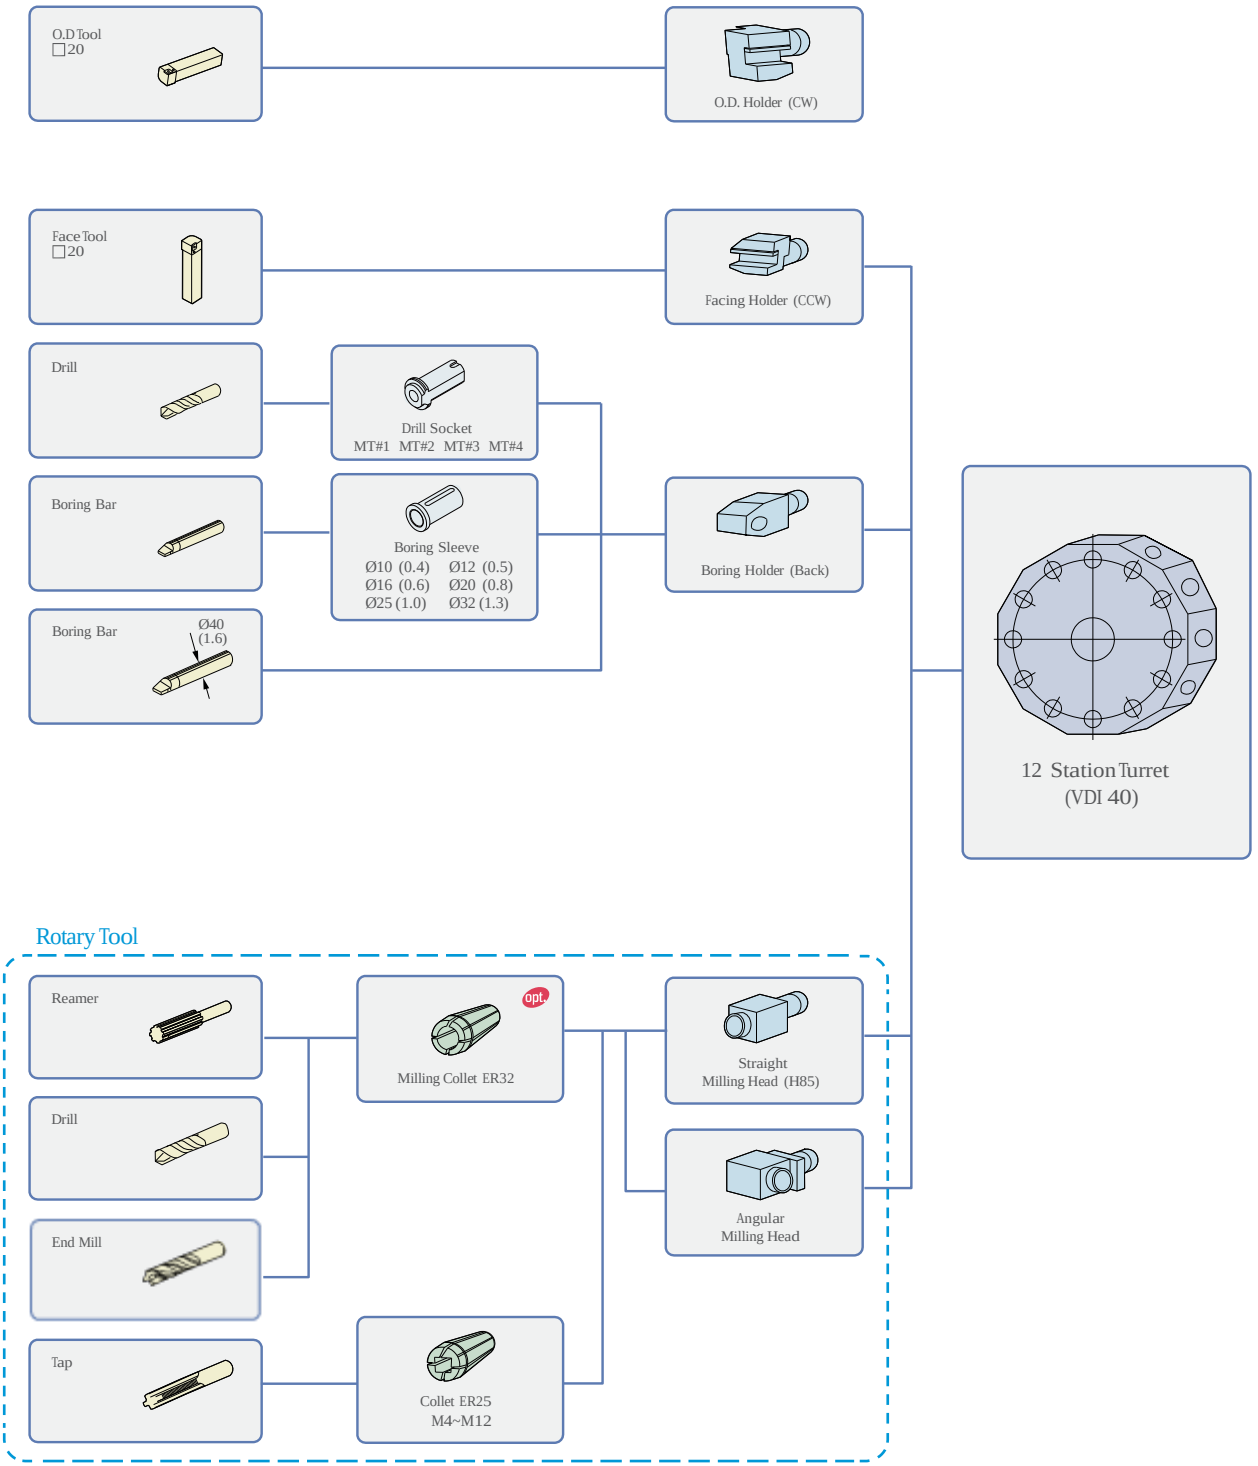

Note) Above tooling system is our recommendation. Depending on export condition, the standard tooling packed with the machine can be different.

Tool Interference Diagram

unit : mm (inch)

PUMA HT230T / HT230TG

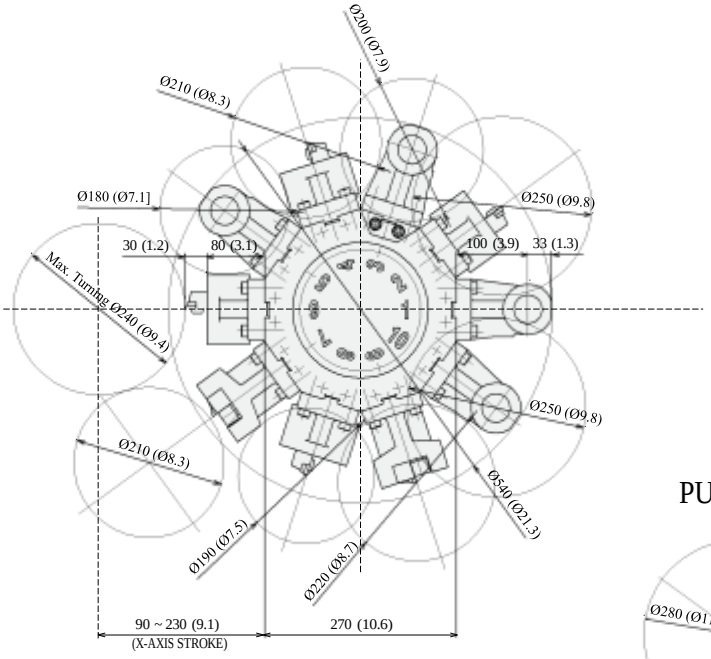

PUMA H250T / QL200H

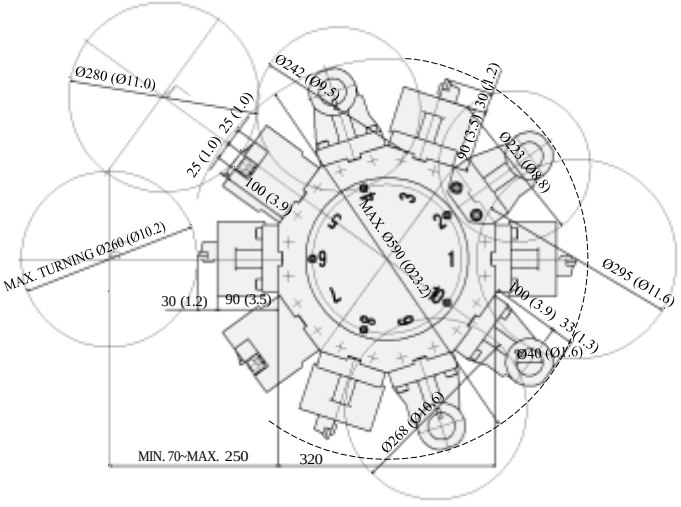

PUMA H310T / QL300H

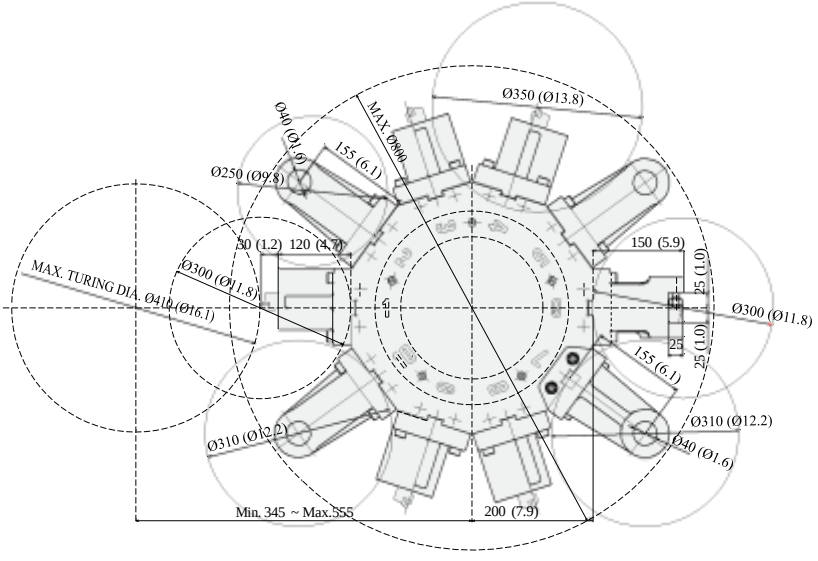

unit : mm (inch)

PUMA H250TM / QL200HM

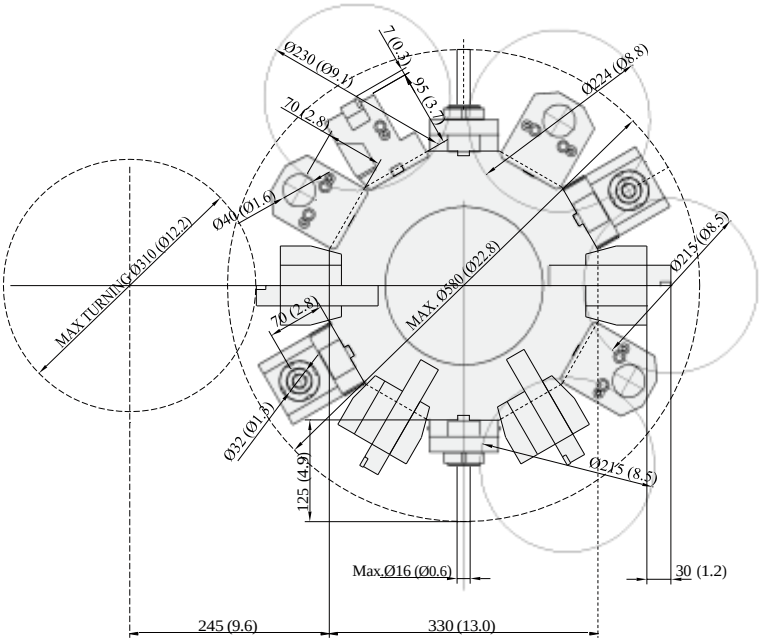

PUMA H310TM / QL300HM

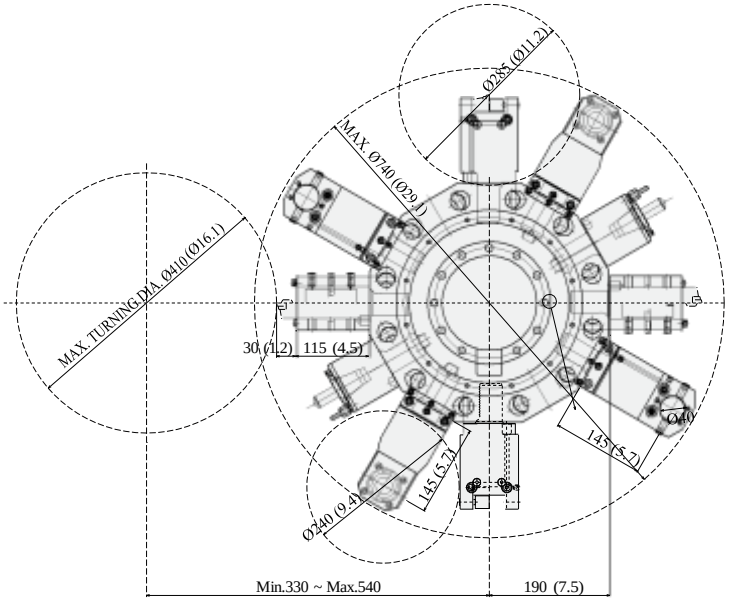

Working Range

unit : mm (inch)

PUMA HT230T / HT230TG

Axis Travel

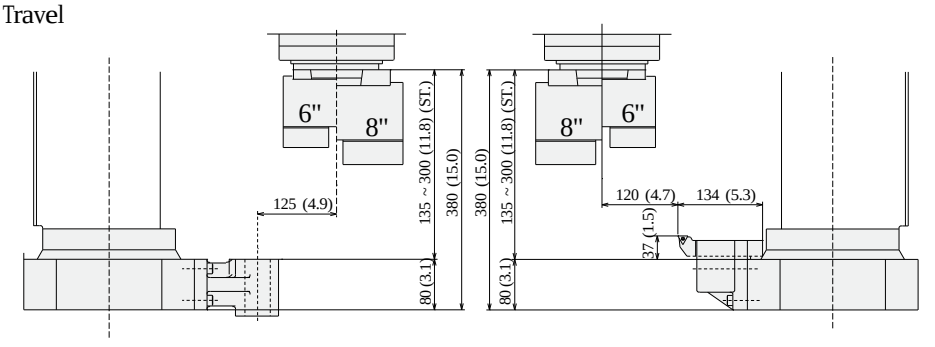

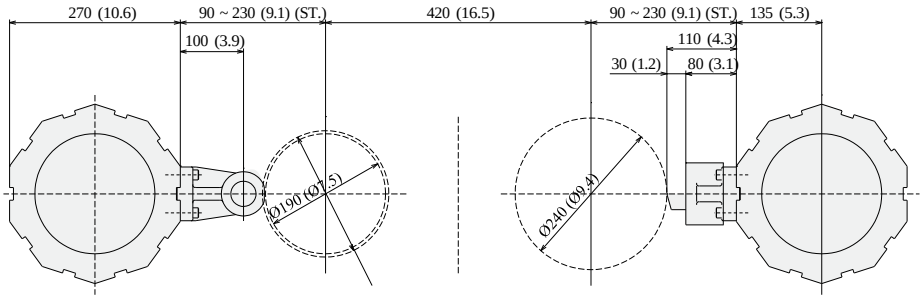

O.D Cutting

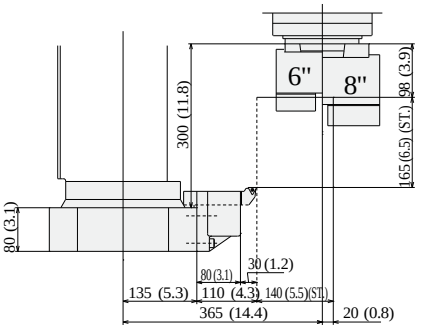

Face Cutting

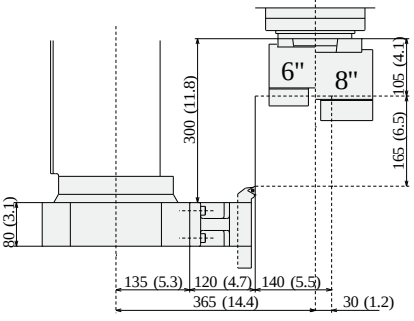

Boring

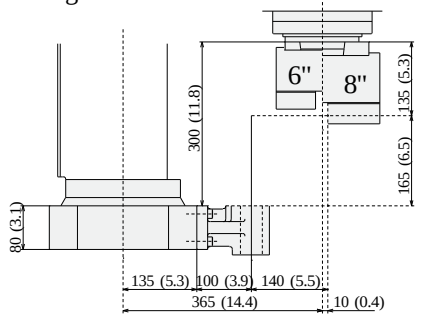

Boring

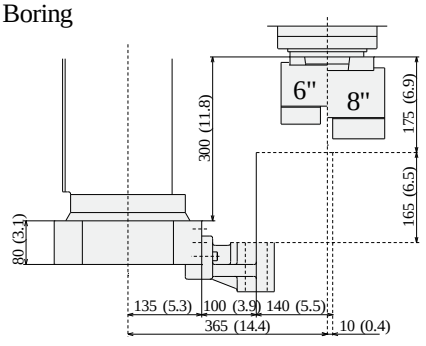

unit : mm (inch)

PUMA H250T / QL200H

Axis Travel

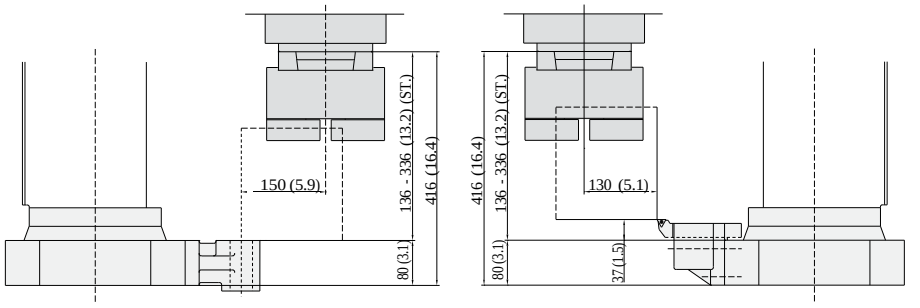

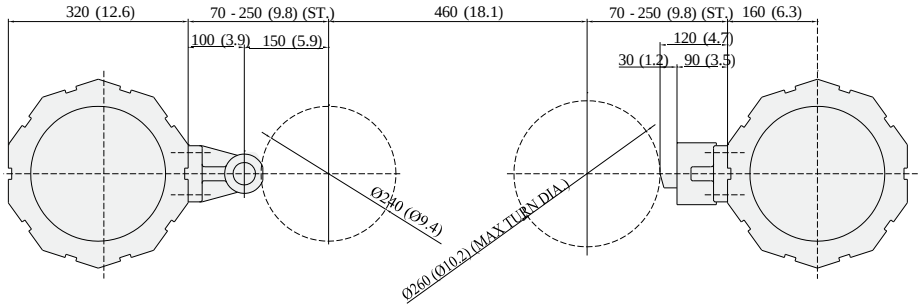

O.D Cutting

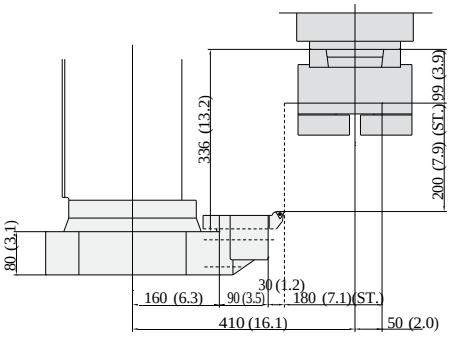

Face Cutting

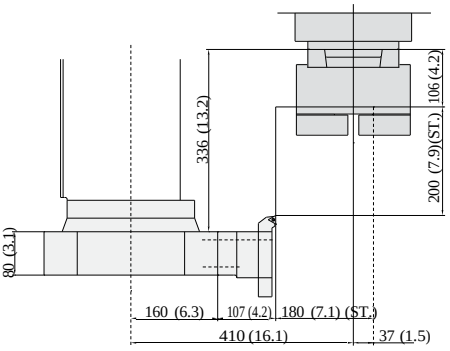

Boring

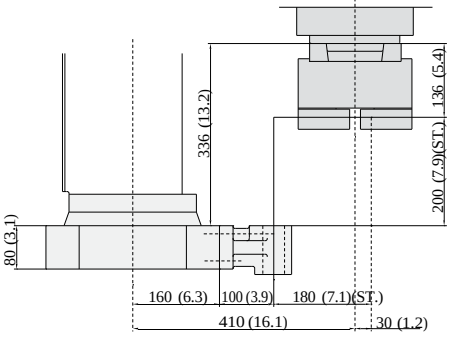

Boring

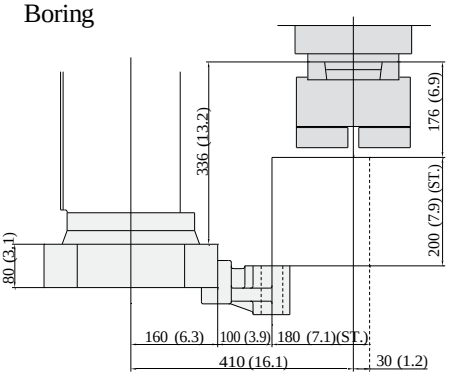

Working Range

unit : mm (inch)

PUMA H310T / QL300H

Axis Travel

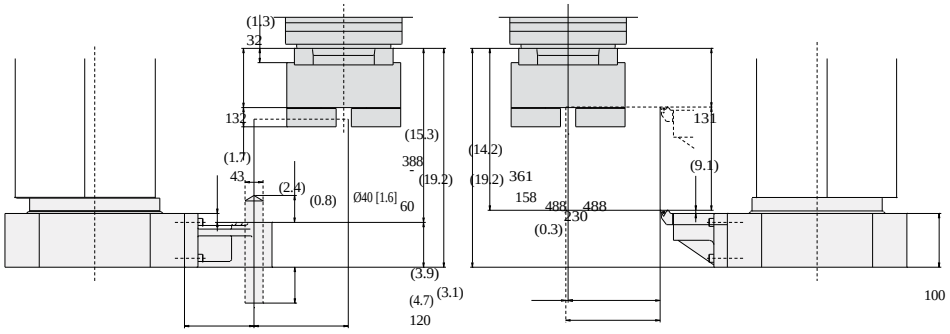

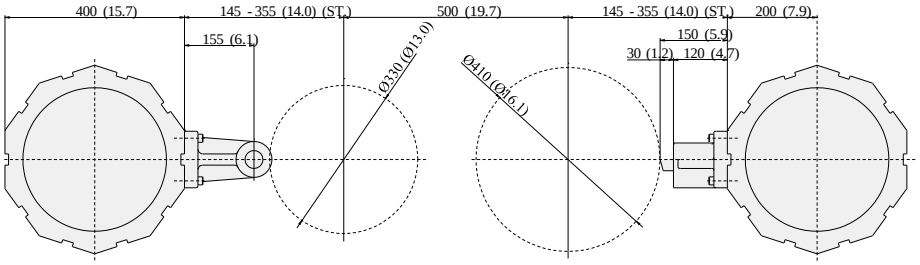

O.D Cutting

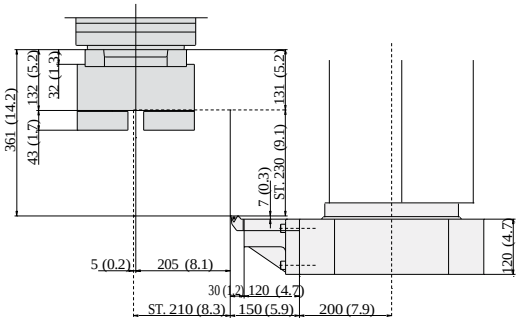

Face Cutting

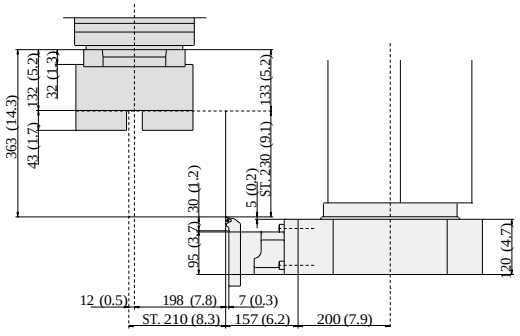

Boring

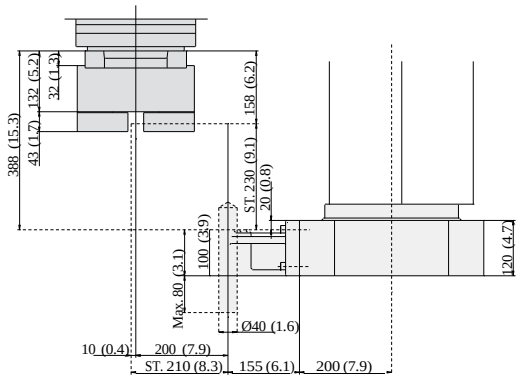

Boring

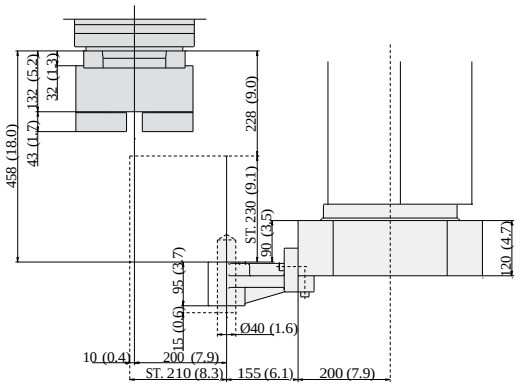

unit : mm (inch)

PUMA H250TM / QL200HM

Axis Travel

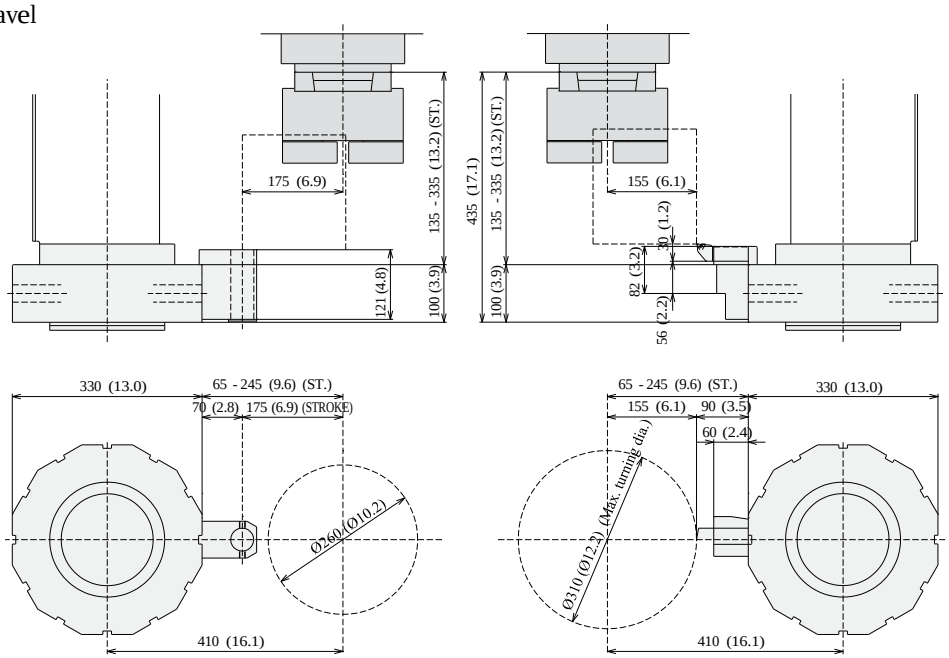

O.D Cutting

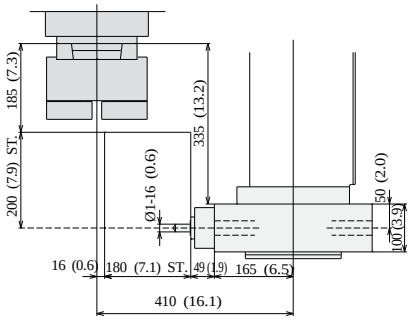

Face Cutting

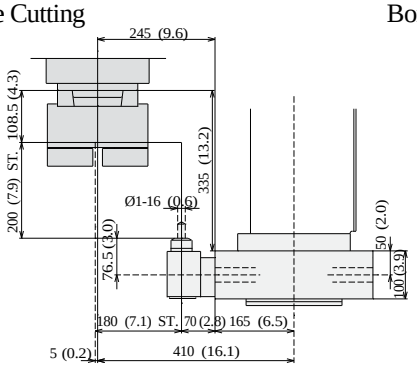

Boring

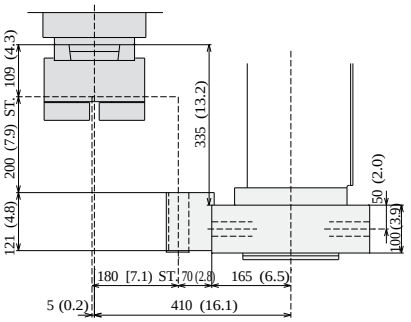

Angular milling head

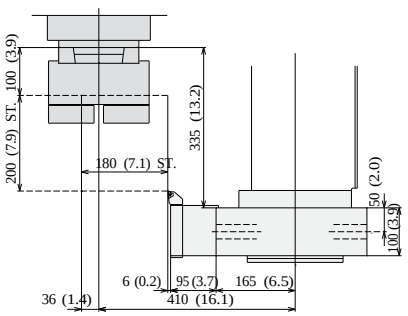

Straight milling head

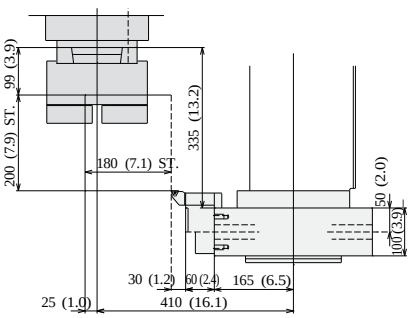

Working Range

unit : mm (inch)

PUMA H310TM / QL300HM

Axis Travel

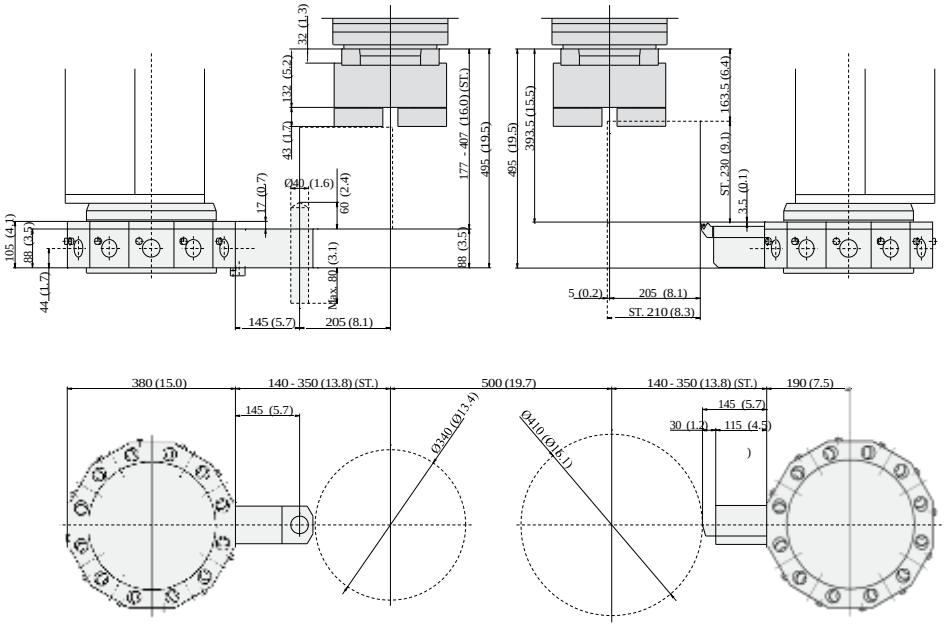

O.D Cutting

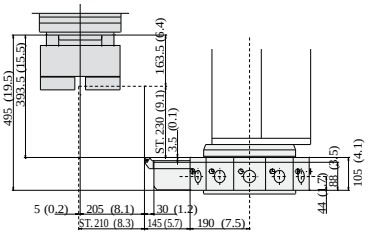

Face Cutting

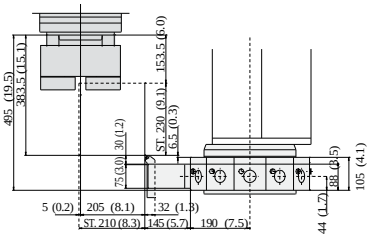

I.D (Cutting)

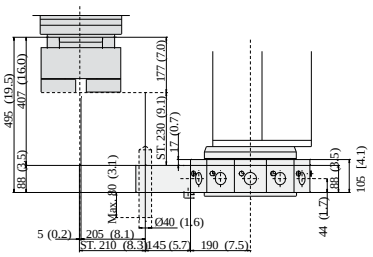

I.D (OFFSET) Cutting

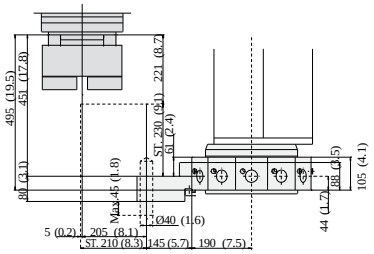

Angular milling head

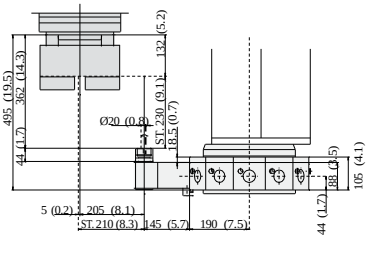

Straight milling head

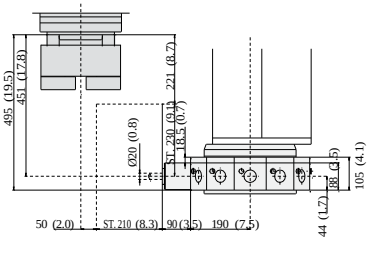

External Dimension

unit : mm (inch)

PUMA HT230T

Top View

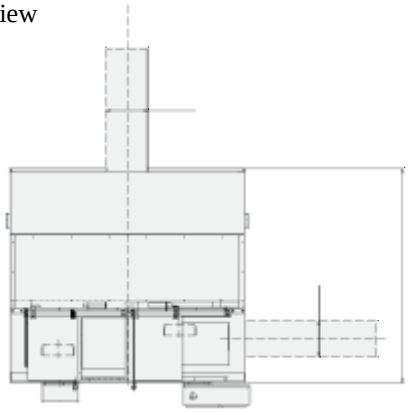

Front View

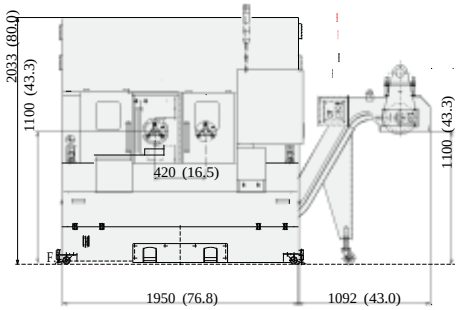

Side View

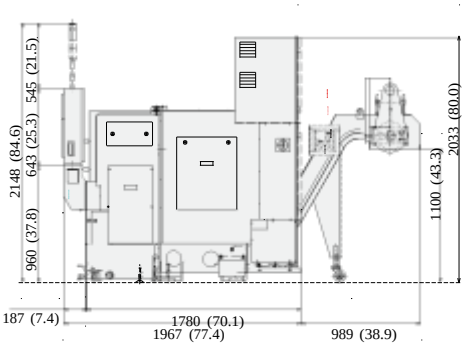

PUMA H250T / H250TM

Top View

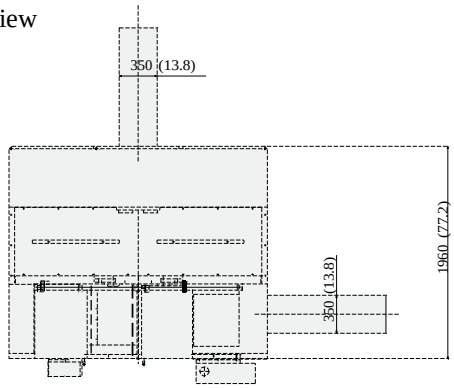

Front View

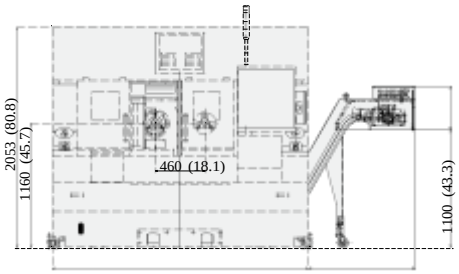

Side View

External Dimension

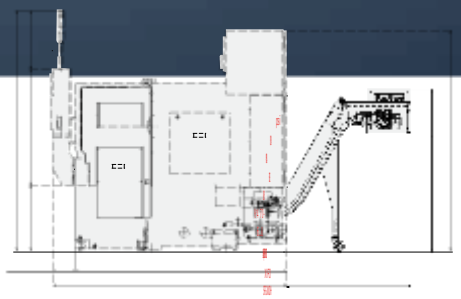

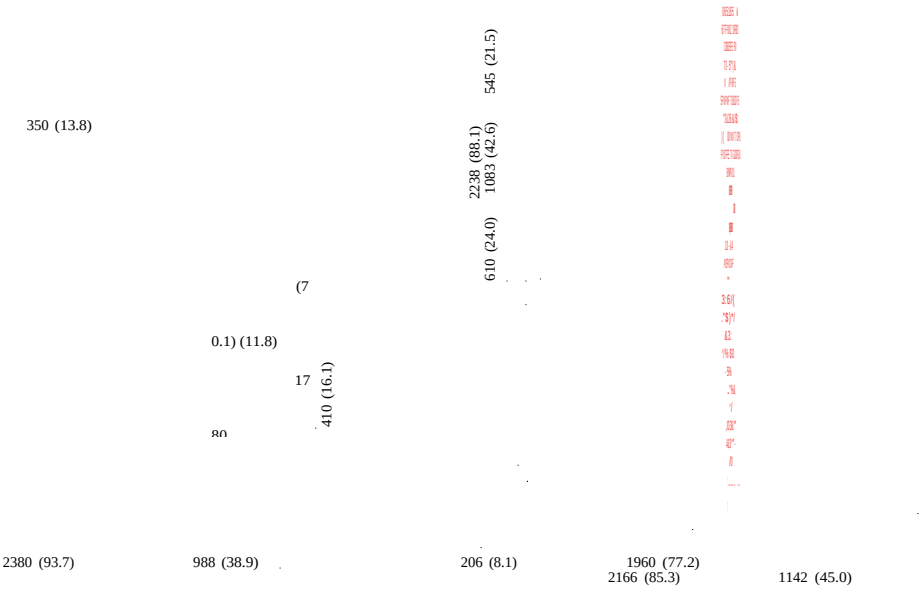

unit : mm (inch)

PUMA H310T ／310TM

Top View

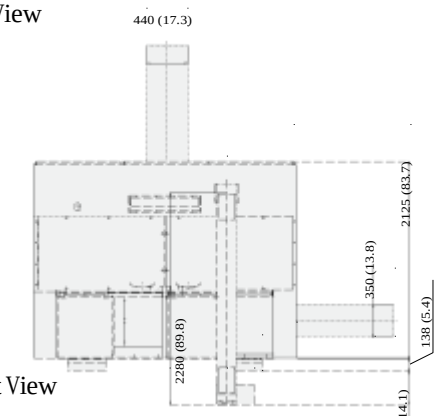

Front View

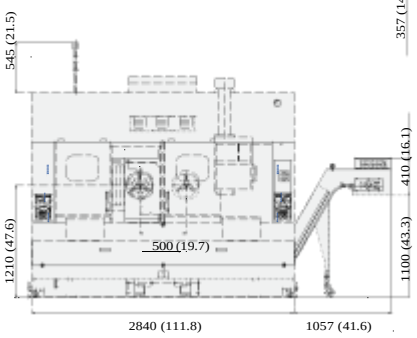

Side View

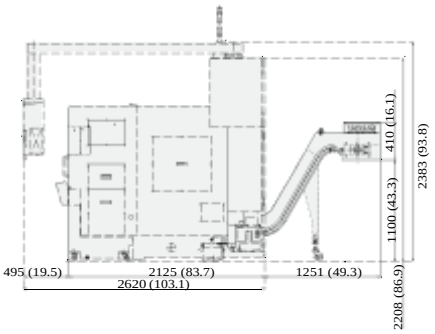

PUMA H230TG

Top View

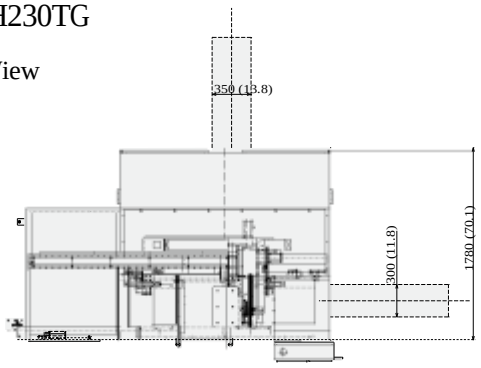

This picture is for A1-type gantry loader application

Front View

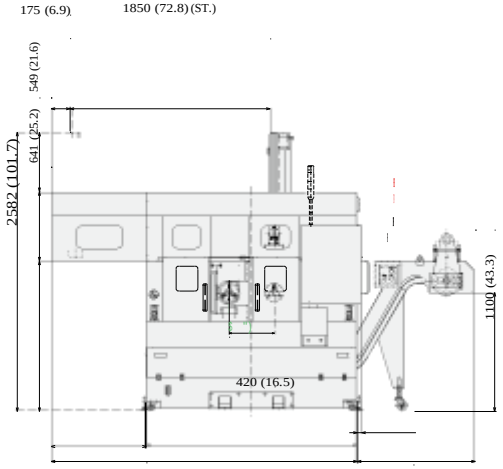

Side View

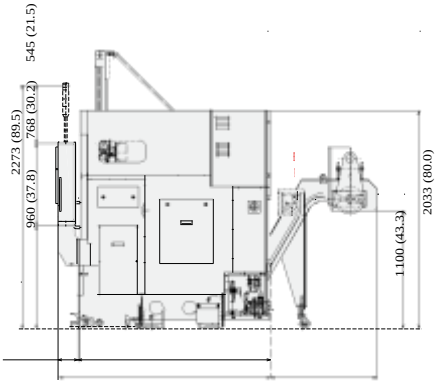

External Dimension

unit : mm (inch)

PUMA QL200H /QL200HM

Top View

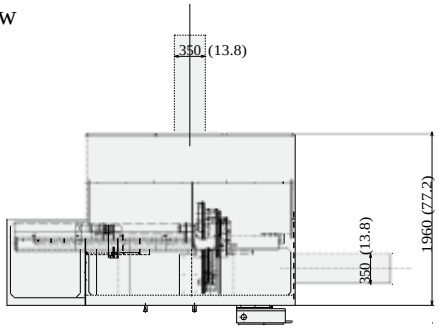

This picture is for A1-type gantry loader application

Front View

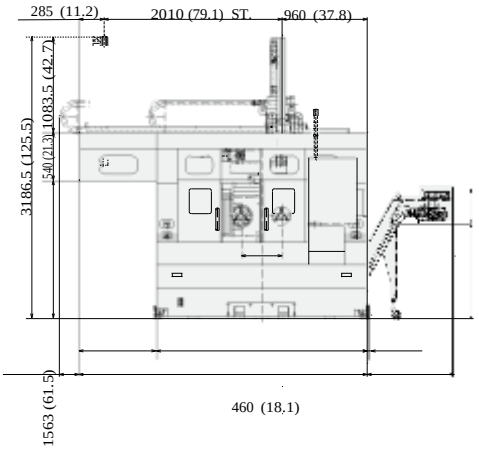

Side View

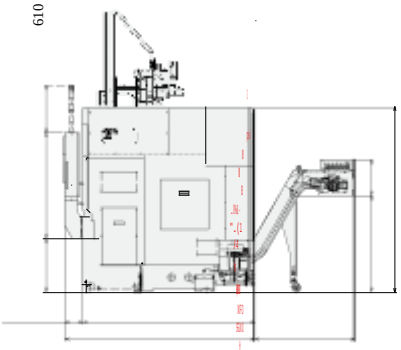

Machine Specifications

PUMA QL300H / QL300HM

Top View

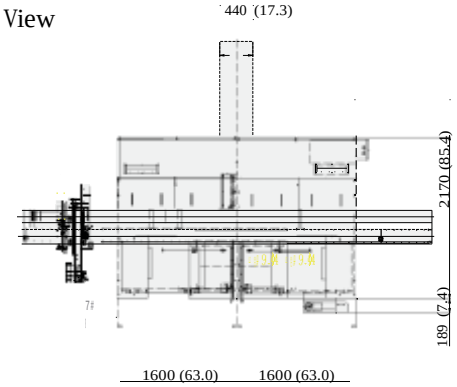

This picture is for A3-type gantry loader application

Front View

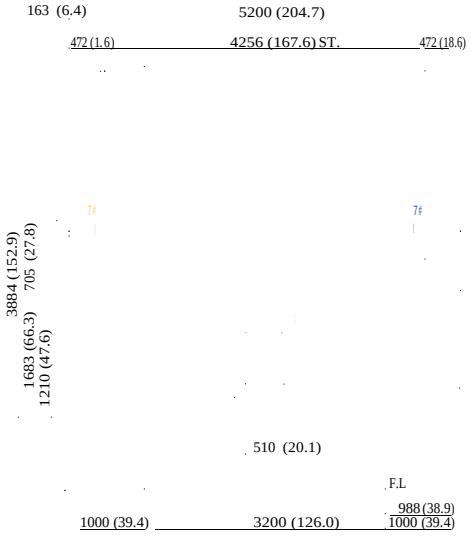

Side View

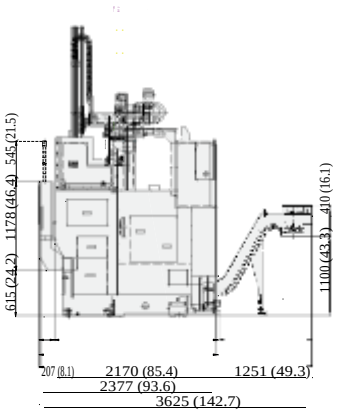

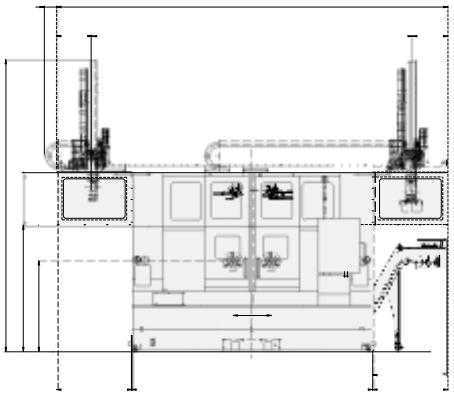

Description		Unit	PUMA HT230T [HT230TG]	PUMA H250T [QL200H]	PUMA H310T [QL300H]	PUMA H250TM [QL200HM]	PUMA H310TM [QL300HM]
Capacity	Distance of spindle centers	mm (inch)	420 (16.5)	460 (18.1)	510 (20.1)	460 (18.1)	510 (20.1)
	Recommendable turning dia.	mm (inch)	Ø160 (6.3)	Ø210 (8.3)	Ø255 (10.0)	Ø210 (8.3)	Ø255 (10.0)
	Max. turning dia.	mm (inch)	Ø240 (9.4)	Ø260 (10.2)	Ø410 (16.1)	Ø310 (12.2)	Ø410 (16.1)
	Max. turning length	mm (inch)	Ø165 (6.5)	200 (7.9)	230 (9.1)	200 (7.9)	230 (9.1)
Travels	X / Z-axis travel	mm (inch)	140 / 165 (5.5 / 6.5)	180 / 200 (7.1 / 7.9)	210 / 230 (8.3 / 9.1)	180 / 200 (7.1 / 7.9)	210 / 230 (8.3 / 9.1)
	X / Z-axis rapid traverse	m/min (ipm)	24 / 24 (944.9 / 944.9)				
Spindle (Left / Right)	Max. spindle speed	r/min	4500		3500	4500	3500
	Spindle nose	ASA	A2-5	A2-6	A2-8	A2-6	A2-8
	Spindle bearing dia. (front)	mm (inch)	Ø90 (3.5)	Ø100 (3.9)	Ø120 (4.7)	Ø100 (3.9)	Ø120 (4.7)
	Spindle bore dia.	mm (inch)	Ø55 (2.2)	Ø62 (2.4)	Ø77 (3.0)	Ø62 (2.4)	Ø77 (3.0)
	C-axis indexing	deg	-			360° (in 0.001° increment)	
Turret	Turret type		V10			BMT55	VDI40
	No. of tool station	st	10+10			12+12	
	OD tool size (Max.)	mm (inch)	25 (1.0)			25 (1.0)	
	Boring bar dia. (Max.)	mm (inch)	Ø40 (1.6)			Ø40 (1.6)	Ø40 (1.6)
	Indexing time (1-station swivel)	s	0.25	0.3	0.35	0.3	0.35
	Rotary tool spindle speed (Max.)	r/min	-			3000	
Motors	Main spindle motor	kW (Hp)	11 [7.5] (14.8 [10.1])	11 (14.8)	18.5 (24.8)	11 (14.8)	18.5 (24.8)
	Rotary tool spindle motor (15min.)	kW (Hp)	-			3.0 (4.0)	4.0 (5.4)
	Servo motor (X / Z-axis)	kW (Hp)	1.2 / 1.2 [1.0 / 1.2] (1.6 / 1.6 [1.3 / 1.6])	1.2 / 1.6 (1.6 / 2.1)	3.0 / 3.0 (4.0 / 4.0)	1.2 / 1.6 (1.6 / 2.1)	3.0 / 3.0 (4.0 / 4.0)
	Coolant pump	kW (Hp)	0.4				
Power source	Electric power supply (Rated capa.)	kVA	25	35	60 [70]	40	70 [80]
Machine Dimensions	height	mm (inch)	2033 (80.0)	2053 (80.8)	2383 (93.8)	2053 (80.8)	2383 (93.8)
	Length	mm (inch)	1950 (76.8)	2380 (93.7)	2840 (111.8)	2380 (93.7)	2840 (111.8)
	Width	mm (inch)	1780 (70.1)	1960 (77.2)	2620 (103.1)	1960 (77.2)	2620 (103.1)
	Weight	kg (lb)	3700 (8157.0)	5200 (11463.9)	7800 (17195.8)	5200 (11463.9)	7800 (17195.8)

[ ] : The machine with Gantry Loader

HT series

Standard Feature

- Chuck clamp confirmation
- Coolant pump for main turret
- Hydraulic pump
- Level bolt & plate
- Soft jaw
- Tool post (hydraulic type)
- Work light

Optional Feature

- 3 Color signal tower
- Additional MPG
- Air blower for chuck (air blaster)
- Air conditioner
- Air gun
- Automatic front door
- Automatic power off
- Chip bucket type
- Chip conveyor type
- Chuck coolant (coolant blaster)
- Coolant gun
- Coolant pressure switch
- Doosan tool monitoring system
- Electric cabinet light
- Electric line filter
- Electric power transformer
- Extra M code
- Flushing coolant
- Hardened & ground hard jaws
- High coolant interface
- Mist collector
- Oil skimmer
- Robot interface
- Shunt trip coil
- Through Spindle Coolant (coolant / air)
- Tool setter (removable)
- U drill holder
- Work & tool counter
- Work locating confirmation (air limit sensing)

- The specifications and information above-mentioned may be changed without prior notice.
- For more details, please contact Doosan.

NC Unit Specifications

Description		Unit	PUMA HT230TG			PUMA QL200H/HM			PUMA QL300H/HM		
Gantry loader application type			A1-type	A2-type	A3-type	A1-type	A2-type	A3-type	A1-type	A2-type	A3-type
Capacity	Max. work dia.×length	mm (inch)	Ø140 x 100 (5.5 x 3.9)			Ø160 x 115 (6.3 x 4.5)			Ø250 x 150 (9.8 x 5.9)		
	Max. work weight	kg (lb)	3 (6.6)			5 (11.0)			8 (17.6)		
Standard loading time		s	7			10			13		
Slide module	X-axis stroke (left-right)	mm (inch)	1850 (72.8)		3280 (129.1)	2210 (87.0)	2010 (79.1)	3580 (140.9)	3105 (122.2)	3105 (122.2)	4200 (165.4)
	Y-axis stroke (up-down)	mm (inch)	545 (21.5)			700 (27.6)			945 (37.2)		
	Z-axis stroke (front-rear)	mm (inch)	180 (7.1)			200 (7.9)			200 (7.9)		
	Loading capacity (Gripper+workpiece mass)	kg (lb)	15 (33.1)			25 (55.1)			40 (88.2)		
	Max.Speed (X / Y / Z-axis)	m/min (ipm)	150 / 120 / 50 (5905.5 / 4724.4 / 1968.5)			150 / 110 / 50 (5905.5 / 4330.7 / 1968.5)			150 / 120 / 50 (5905.5 / 4724.4 / 1968.5)		
	Servo motor power (X / Y / Z-axis)	kW	0.75 / 0.75 / 0.5			1.4 / 1.4 / 0.5			1.6 / 1.6 / 0.75		
Gripper head	Gripper		2 sets of Double 3-jaw chuck type with individual spring pusher								
	Wrist swivel angle	deg	180			180			180		
	Swivel time (per every180˚)	s	0.5			0.6			1		
	Jaw stroke	mm (inch)	16 (0.6)			20 (0.8)			20 (0.8)		
	Gripping force (Max./each chuck)	N	784			1850			1850		
Turn around module	Gripper		2 sets of Double 3-jaw chuck type with individual spring pusher								
	Distance between center	mm (inch)	420 (16.5)			460 (18.1)			510 (20.1)		
	Shifting distance (Max.)	mm (inch)	245 (9.6)			260 (10.2)			320 (12.6)		
	Gripper rotating angle	deg	-			90			90		
Work stocker	Number of pallets	st.	16 (A3 TYPE : 16 x 2)								
	Number of lifting device		Left	Right	Double	Left	Right	Double	Left	Right	Double
	Allowable work dia.×length (Min.)	mm (inch)	Ø50~Ø150 (Ø2.0~Ø5.9)			Ø25~Ø160 (Ø1.0~Ø6.3)			Ø50~Ø250 (Ø2.0~Ø9.8)		
	Allowable work loading (Max./pallet)	kg (lb)	40 (88.2)			71 (156.5)			150 (330.7)		
	Min. allowable work height	mm (inch)	15 (0.6)								
Power source	Electric power supply (Rated capa.)	kVA	30			40			70		
Machine Dimensions	Machine height (Max. / Min.)	mm (inch)	{ 2582/2037 } (101.6/80.2)			{ 3187/2487 } (125.5/97.9)			-		
	Machine dimensions w/o chip conveyor	mm (inch)	2830 x 1780 (111.4 x 70.1)	3020 x 1780 (118.9 x 70.1)	3900 x 1780 (153.5 x 70.1)	3255 x 1960 (128.1 x 77.2)	3255 x 1960 (128.1 x 77.2)	4130 x 1960 (162.6 x 77.2)	5000 x 2377 (196.9 x 93.6)	5000 x 2377 (196.9 x 93.6)	5200 x 2377 (204.7 x 93.6)
	Machine dimensions with side chip conveyor	mm (inch)	3922 x 1780 (154.4 x 70.1)	4112 x 1780 (161.9 x 70.1)	-	4243 x 1960 (167.0 x 77.2)	4243 x 1960 (167.0 x 77.2)	-	5988 x 2377 (235.7 x 93.6)	5988 x 2377 (235.7 x 93.6)	-
	Machine dimensions with rear chip conveyor	mm (inch)	2830 x 2769 (111.4 x 109.0)	3020 x 2769 (118.9 x 109.0)	3900 x 2769 (153.5 x 109.0)	3255 x 3102 (128.1 x 122.1)	3255 x 3102 (128.1 x 122.1)	4130 x 3102 (162.6 x 122.1)	5000 x 3418 (196.9 x 134.6)	5000 x 3418 (196.9 x 134.6)	5200 x 3418 (204.7 x 134.6)
	Machine weight (exclude stocker and chip conveyor)	kg (lb)	4100 (9038.8)			5800 (12786.6)			9000 (19841.3)		

{ } : Option

QL series

Standard Feature

- 3 Color signal tower
- Air blower for chuck (Air blaster)
- Chuck clamp confirmation
- Chuck coolant (coolant blaster)
- Coolant pump for main turret
- Gantry loader type
- Gantry top door
- Hydraulic pump
- Level bolt & plate
- MPG
- Protect cover
- Soft jaw
- Tool post (hydraulic type)
- Turn over unit
- Work light

Optional Feature

- Air conditioner
- Air gun
- Automatic power off
- Chip bucket type
- Chip conveyor type
- Chute for workpiece inspection
- Coolant gun
- Coolant pressure switch
- Doosan tool monitoring system
- Electric cabinet light
- Electric line filter
- Electric power transformer
- Extra M code
- Flushing coolant
- Gantry Loader Stocker
- Hardened & ground hard jaws
- High coolant interface
- Mist collector
- Oil skimmer
- Shunt trip coil
- Through Spindle Coolant (coolant / air)
- Tool setter (removable)
- Work & tool counter
- Work locating confirmation (air limit sensing)

- The specifications and information above-mentioned may be changed without prior notice.
- For more details, please contact Doosan.

Gantry Loader Specifications

Fanuc i series

AXES CONTROL

- Controlled axes	4 [X, Z+X, Z] axes
- Simultaneous controlled axes	4 [2+2] axes
- Backlash compensation	0 ~ ±9999 pulses
- Backlash compensation for each rapid traverse and cutting feed	
- Chamfering on/off	
- Emergency stop	
- Fine Acc & Dec control	
- Follow-up	
- HRV2 control	
- Inch / Metric conversion	
- Increment system 1/10	0.0001 / 0.00001 mm/inch
- Interlock	All axis / each axis
- Least input command	0.001 / 0.0001 mm/inch
- Machine lock	All axis / each axis
- Mirror image	
- Overtravel	
- Position switch	
- Servo off	
- Stored stroke check 1	
- Stroke limit check before move	
- Unexpected disturbance torque detection function	

OPERATION

- Automatic operation (memory)	
- Buffer register	
- DNC operation (Reader / puncher interface is required)	
- Dry run	
- Handle incremental feed	X1, X10, X100
- Manual handle interruption	
- JOG feed	
- Manual handle feed	1 unit
- Manual intervention and return	
- Manual pulse generator	1 ea
- Manual reference position return	
- Program number search	
- Program restart	
- Sequence number search	

INTERPOLATION FUNCTIONS

- 1st. reference position return	Manual, G28
- 2nd. reference position return	G30
- Continuous thread	
- Dwell (per sec)	G04
- High speed skip	
- Linear interpolation	G01
- Multiple threading	
- Positioning	G00
- Reference position return check	G27
- Thread cutting / Synchronous cutting	
- Thread cutting retract	
- Torque limit skip	
- Variable lead threading	

FEED FUNCTION

- Automatic acceleration / deceleration	
- Cutting feedrate clamp	
- Feed per minute	
- Feed per revolution	
- Feedrate override (10% unit)	0 - 200 %
- Jog feed override (10% unit)	0 - 2000 mm/min
- Manual per revolution feed	
- Override cancel	
- Rapid traverse override	F0, 25, 100 %
- Tangential speed constant control	

AUXILIARY / SPINDLE SPEED FUNCTION

- Spindle orientation	
- Actual spindle speed output	
- Auxiliary function lock	
- Constant surface speed control	
- High speed M / S / T interface	
- M - code function	M3 digits
- S - code function	S4 / S5 digits
- Spindle serial output	S4 / S5 digits
- Spindle speed override	0 - 150 %

PROGRAM INPUT

- Absolute / incremental programming	
- Addition of custom macro common variables	
- Automatic coordinate system setting	
- Canned cycle for drilling	
- Canned cycle for turning	
- Circular interpolation by R programming	
- Control in / out	
- Coordinate system setting	G50
- Coordinate system shift	
- Custom macro	
- Decimal point programming	
- Diameter / radius programming (X axis)	
- Direct drawing dimension programming	
- G code system A / B / C	
- Input unit 10 time multiply	
- Label skip	
- Manual absolute on and off	
- Maximum program dimension	±9 digit
- Multiple repetitive canned cycle II	
- Optional block skip	9 piece
- Parity check	
- Plane selection	G17, G18, G19
- Program number	O4 digit
- Program stop / end (M00, M01 / M02, M30)	
- Programmable data input	G10
- Sequence number	N5 digit
- SUB program call	4 folds nested
- Tape code : ISO / EIA auto recognition	EIA RS422 / ISO840
- Tape format for FANUC Series 15	
- Work coordinate system	G52 - G59

TOOL FUNCTION / TOOL COMPENSATION

- Automatic tool offset	
- Direct input of offset value measured B	
- T-code function	T2+2 digits
- Tool geometry / wear compensation	
- Tool life management	
- Tool nose radius compensation	
- Tool offset	G43, G44, G49
- Tool offset pairs	64 pairs

EDITING OPERATION

- Back ground editing	
- Extended part program editing	
- Number of registered programs	400 ea
- Part program editing	
- Part program storage length	1280 m
- Play back	
- Program protect	

SETTING AND DISPLAY

- Actual cutting feedrate display	
- Alarm display	
- Alarm history display	
- Current position display	
- Directory display and punch for each group	
- Directory display of floppy cassette	
- Display of spindle speed and T code at all screens	
- External message display	
- Help function	
- Multi-language display	
- Operation history display	
- Parameter setting and display	
- Program name display	31 characters
- Run hours / part count display	
- Self-diagnosis function	
- Servo setting screen	
- Spindle setting screen	
- Status display	

DATA INPUT / OUTPUT

- External data input	
- External key input	
- External program input	
- External program number search	
- External work number search	
- Memory card input/output	
- Reader/puncher interface	CH1. interface
- RS232C interface	

OTHER

- Cycle start and lamp	
- Display unit	10.4" Color LCD / MDI
- Feed hold and lamp	
- NC and servo ready	
- PMC system	
- EZ guide i (Conversational programming solution)	
- Ethernet function	

NC Unit Specifications

Fanuc 31i

AXES CONTROL

- Controlled path of HT230T / H250T / H250TM / H310T / H310TM — 2 path
- Controlled path of HT230TG / QL200H / QL200HM / QL300H / QL300HM — 2+1 path
- Controlled axes of HT230T / H250T / H310T / HT230TG / QL200H / Q300H — 4 [2+2] axes
- Controlled axes of H250TM / H310TM / QL200HM / QL300HM — 8 [4+4] axes
- Simultaneous Controlled axes of HT230T / H250T / H310T / HT230TG / QL200H / Q300H — 4 [2+2] axes
- Simultaneous Controlled axes of H250TM / H310TM / QL200HM / QL300HM — 6 [3+3] axes
- Axis control by PMC
- Backlash compensation — 0 ~ ±9999 pulses
- Backlash compensation for each rapid traverse and cutting feed
- Position switch
- Chamfering on / off
- Emergency stop
- Fine Acc & Dec control
- Follow-up
- High speed HRV control
- HRV2 control
- Inch / Metric conversion
- Interlock — All axis / each axis
- Least input command — 0.001 / 0.0001 mm/inch
- Machine lock — All axis / each axis
- Mirror image
- Overtravel
- Servo off
- Stored stroke check 1
- Unexpected disturbance torque detection function

OPERATION

- Automatic operation (memory)
- Buffer register
- Dry run
- Handle incremental feed — X1, X10, X100
- JOG feed
- Manual intervention and return
- Manual pulse generator — 1 ea
- Manual reference position return
- MDI operation
- Program number search
- Sequence number search
- Single block

INTERPOLATION FUNCTIONS

- 1st. reference position return — Manual, G28
- 2nd. reference position return — G30
- Circular interpolation — G02
- Continuous threading
- Dwell (per sec) — G04
- Linear interpolation — G01
- Multiple threading
- Reference position return check — G27
- Skip — G31
- Thread cutting / Synchronous cutting
- Thread cutting retract
- Torque limit skip

FEED FUNCTION

- Automatic acceleration / deceleration
- Cutting feedrate clamp
- Feed per minute
- Feed per revolution
- Feedrate override (10% unit) — 0 - 200 %
- Jog feed override (10% unit) — 0 - 2000 mm/min
- Manual per revolution feed
- Override cancel
- Rapid traverse override — F0, 25, 100 %
- Rapid traverse rate
- Tangential speed constant control

AUXILIARY / SPINDLE SPEED FUNCTION

- Spindle orientation
- Auxiliary function lock
- Constant surface speed control — G96
- M - code function — M3 digits
- Rigid tapping
- S - code function — S4 / S5 digits
- Spindle serial output — S4 / S5 digits
- Spindle speed override — 0 - 150 %

PROGRAM INPUT

- Absolute / incremental programming
- Automatic coordinate system setting
- Canned cycle for drilling
- Canned cycle for turning
- Circular interpolation by R programming
- Control in/out
- Coordinate system setting — G50
- Coordinate system shift
- Custom macro
- Macro executor
- Decimal point programming / pocket calculator type decimal point programming
- Diameter/radius programming (X axis)
- Direct drawing dimension programming
- Direct input of coordinate system shift
- G code system A
- Input unit 10 time multiply
- Label skip
- Manual absolute on and off
- Maximum program dimension — ±9 digit
- Multiple repetitive canned cycle — G70 - G76
- Multiple repetitive canned cycle Ⅱ
- Optional block skip — 9 piece
- Parity check
- Plane selection — G17, G18, G19
- Program number — O4 digit
- Program stop / end (M00, M01 / M02, M30)
- Programmable data input — G10
- Sequence number — N5 digit
- SUB program call — 10 folds nested
- Tape code : ISO / EIA auto recognition — EIA RS422 / ISO840
- Work coordinate system — G52 - G59

TOOL FUNCTION / TOOL COMPENSATION

- Automatic tool offset
- Direct input of offset value measured
- Direct input of offset value measured B
- T-code function — T2+2 digits
- Tool geometry / wear compensation
- Tool life management
- Tool nose radius compensation
- Tool offset — G43, G44, G49
- Tool offset pairs — ±6 digits : 64 pairs
- Tool offset value counter input

EDITING OPERATION

- Back ground editing
- Extended part program editing
- Number of registered programs — 500 ea
- Part program editing
- Part program storage length — 640 m
- Program protect

SETTING AND DISPLAY

- Actual cutting feedrate display
- Alarm display
- Alarm history display
- Current position display
- Display of spindle speed and T code at all screens
- Help function
- Multi-language display
- Operation history display
- Parameter setting and display
- Run hours / part count display
- Self-diagnosis function
- Servo setting screen
- Spindle setting screen
- Status display

DATA INPUT / OUTPUT

- External key input
- External work number search — 15 points
- Memory card input / output
- Reader / puncher interface — CH1. interface
- RS232C interface

OTHER

- Cycle start and lamp
- Display unit — 10.4" Color TFT LCD
- Feed hold and lamp
- NC and servo ready
- PMC system
- Reset / rewind

INTERFACE FUNCTION

- Ethernet function — Embedded ethernet

OPTIONAL SPECIFICATIONS

- Controlled axes expansion (Total) — Max.8 [4+4] axes
- Stored stroke 2 and 3
- DNC operation (Reader / puncher interface is required)
- Manual handle feed — 2 units
- Manual handle interruption
- Reference position shift
- Tool retract and recover
- 3rd / 4th reference point return
- Circular threading
- Multi step skip
- Variable lead threading
- Advanced preview control
- External deceleration
- Feed forward function
- Feed stop
- Addition of workpiece coordinate system pair — 48 pairs
- Optional block skip (soft operator's panel) — 9 piece
- Pattern data input
- Work coordinate system preset
- Addition of tool pairs for tool life management — 128 pairs
- Tool load monitoring system
- Tool offset pairs — 64 / 99 / 200 / 400 / 999 / 2000 pairs
- Number of registered programs & Part program storage length
  - 1280 M (512KB) - 1000 ea
  - 2560 M (1MB) - 1000 ea
  - 5120 M (2MB) - 1000 ea
  - 10240 M (8MB) - 1000 ea
  - 20480 M (8MB) - 1000 ea
  - 2560 M (1MB) - 2000 ea
  - 5120 M (2MB) - 4000 ea
  - 10240 M (4MB) - 4000 ea
  - 20480 M (8MB) - 4000 ea
- Play back
- Directory display of floppy cassette

http://www.doosaninfracore.com/machinetools/

Head Office
Doosan Tower 20th FL., 275, Jangchungdan-Ro(St), Jung-Gu, Seoul
Tel : +82-2-3398-8693 / 8671 / 8680 Fax : +82-2-3398-8699

Doosan Infracore America Corp.
19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.
Tel : +1-973-618-2500 Fax : +1-973-618-2501

Doosan Infracore Germany GmbH
Emdener Strasse 24, D-41540 Dormagen, Germany
Tel : +49-2133-5067-100 Fax : +49-2133-5067-001

Doosan Infracore Yantai Co., LTD
13 Building, 140 Tianlin Road, Xuhui District, Shanghai, China (200233)
Tel : +86-21-6440-3384 (808, 805) Fax : +86-21-6440-3389

Doosan Infracore India Pvt., Ltd. Technical Center
106 / 10-11-12, Amruthalli, Bellary road, Byatarayanapura, Bagalore 560092, India
Tel : +91-80-4266-0100 / 0122 / 0101

Doosan International South East Asia Pte Ltd.
42 Benoi Road, Jurong 629903, Singapore
Tel : +65-6499-0200 Fax : +65-6861-3459

Doosan Machine Tools

Optimal Solutions for the Future

EN 141210SU

- The specifications and information above-mentioned may be changed without prior notice.
- For more details, please contact Doosan.